

MULTITASKS

RSL

FAE multi-function head for tractors from 80 to 190 hp.

The RSL is a multifunction head that enables milling of slabs of rock and asphalt, crushing of stones and stabilization of the ground, to a depth of 11 in. The compact size, low weight and minimum operating width of 39 in make it perfect in limited spaces such as small areas of asphalt and in road maintenance.


The gear transmission enables operation with constantly optimal levels of torque and power. The dedicated teeth guarantee optimal results in the presence of stones and slabs of rock. The crushing chamber is protected by Hardox coatings to offer maximum wear resistance even in the most demanding conditions.



Side wear plates on the inner sides of the frame highly resistant to wear and tear, equalling less down time due to replacement




Rear access panel



Hardox® Counter-blades (welded)



Rear grid
the grid on the rear door helps define the size of the output materials.

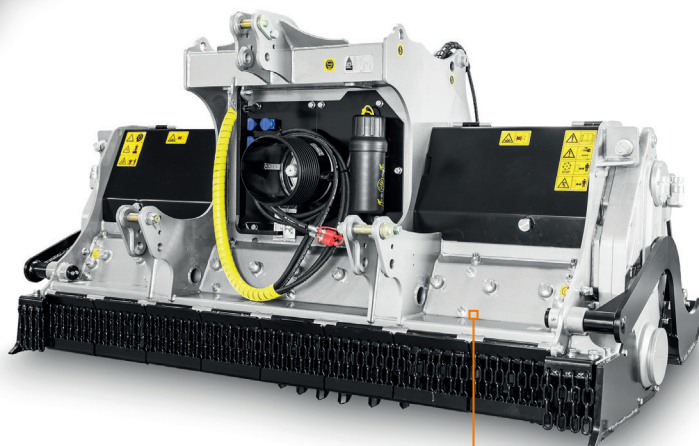


Hardox® steel - Wear plates
these allow the machine to resist wear and tear and can be easily replaced as needed

MAIN OPTIONS




Hydraulic top link



Bolt-on chain's protection plates



Multiple tooth options



The **Water Spray System** (Basic & High Flow) has the dual function of cooling and mixing



80-190 hp



Depth 11 in max



STANDARD EQUIPMENT

Hydraulic rear hood	Gearbox with freewheel
Interchangeable inner antiwear plates in Hardox	Friction clutches (RSL/DT)
Enclosed machine body	PTO shaft with cam clutch
Bolted grid on rear hood	Bolted-on rotor shafts (in forged steel)
Inside lateral protection	Flat pressed welded steel counter-blades
Protection chains	Hydraulically adjustable skids
Transmission with side gearbox (RSL/DT)	Dozing blades

OPTIONS

Bolt-on chain's protection plates	Water spray system WSS Basic
Multiple tooth options	Water spray system WSS High Flow (RSL/DT)
Hydraulic top link	
IVT - CVT or creeper transmission mandatory	Forestry tires and carrier belly pan strongly recommended

MODEL	RSL/ST 100	RSL/ST 125	RSL/ST 150	RSL/DT 175	RSL/DT 200	RSL/DT 225
Tractor (hp)	80-120	90-120	100-120	120-190	130-190	140-190
PTO (rpm)	540	540	540	1000	1000	1000
Working width (in)	39	49	58	68	77	87
Total width (in)	53	62	72	81	91	100
Weight (Kg)	3527	3968	4321	5181	5512	5842
Rotor diameter (in)	23.4	23.4	23.4	23.4	23.4	23.4
Working depth (in) (Max. 1-Max. 2)	6-11	6-11	6-11	6-11	6-11	6-11
ROTOR G/3						
No. teeth type G/3+STC/3/FP	28+6	36+6	42+6	50+6	60+6	70+6
ROTOR R						
Working depth (in) (Max. 1-Max. 2)	6-11	6-11	6-11	6-11	6-11	6-11
No. teeth type R+R/HD	58+16	82 +16	98+16	122+16	138+16	154+16

Max. 1: with rotor only **Max. 2:** maximum depth (maximum working depth depending on ground conditions).
 This information refers to the machine equipped as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE G



G/3
(standard)



G/3/HD
(option)



ADAPTOR G/3 R 44
(option)

ROTOR TYPE R



R 65
(standard)



R/HD 65
(option)



R 44
(option)



ADAPTOR R 65
(option)



STC/3/FP
(side scraper)