


FORESTRY MULCHERS FOR EXCAVATORS

BL2/EX/VT

Forestry mulcher with bite limiter technology.

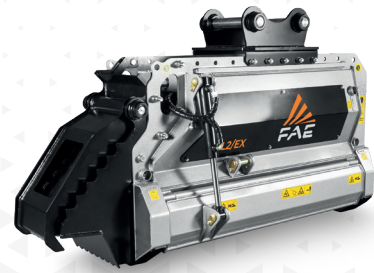

26-37 gal/min



Ø 6 in max



8-14 t

STANDARD EQUIPMENT

55/38cc variable torque hydraulic piston motor - (26-37 gal/min)	Belt transmission
Flow control system valve	Bulkhead for hydraulic connections
Safety and anticavitation valve	Hydraulic rear hood
Enclosed / anti dust machine body	Bite Limiter rotor
Motor enclosed in the frame	

OPTIONS

Customized setting hydraulic motor	Hydraulic thumb
Hydraulic front hood for excavator AUX line	Customized attachment bracket with pins
Rear deflector	Customized attachment bracket with pins and leg
Rear thumb bracket	Multiple tooth options
Diverter valve (plug in and play)	
Not supplied with hoses	Case drain required

MODEL	BL2/EX/VT 100	BL2/EX/VT 125
Flow rate (gal/min)	26-37	26-37
Pressure (PSI)	2600-5080	2600-5080
Excavator weight (t)	8-14	8-14
Working width (in)	39	49
Weight (lbs)	1257	1378
Rotor diameter (in)	14.2	14.2
Max shredding diameter (in)	6	6
No. blades type MINI BL	18	22

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.



Blade MINI BL
(standard)



MINI C/3
(option)